

Rejuva® Roof Beading+ is a special designed component to make Rejuva® Roof Coating super hydrophobic. The water based solution reacts with Rejuva® Roof Coating and mineral roof surfaces.

**Recommended for:** Rejuva® Roof Coatings on all surfaces according to the data sheet of Rejuva® Roof Coating.

**Preparation:**

Mix Rejuva® Beading+ and Rejuva® Roof Coating with 200 RPM during at least 2 minutes and until the white traces from Rejuva® Beading+ are not visible.

**Application:** Use an airless sprayer or sprayer. A minimum temperature of 5 °C is required. See the technical datasheet for Rejuva®.

**Colour:** Milky white.

**Drying time:** See the data sheet of Rejuva® Roof Coating.

**Packing size:** 800 ml bottles.

**Equipment care:** Cleaned up in water directly after use.


**Mixing rate:** 800 ml of Rejuva® Beading+ per 20 KG Rejuva® Roof Coating.

**Storage:** Protect from direct sunlight, heat sources and frost. Keep opened container tightly sealed.

**Shelf life:** 12 months (in original sealed container).

**Safety and regulations:**

In accordance with current labelling non-hazardous content. More information regarding precautions can be found on the product label or on the manufacturer's safety data sheet.

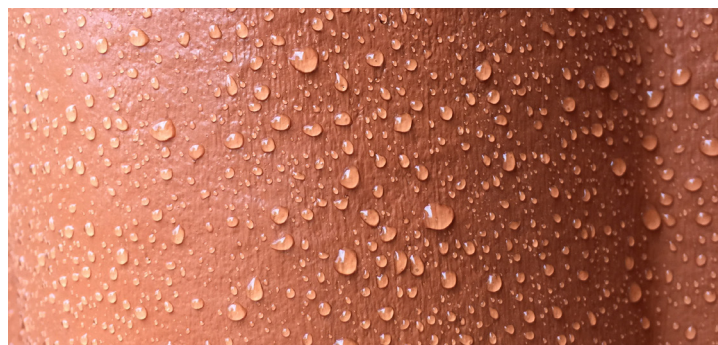

Status: July 2018. This BECO TREAT ApS information was compiled according to the state of the art and our present experience. It is intended to support craftsmen in selecting the proper materials and using them correctly. The information provided here does not release the user from the responsibility for checking the material for its suitability for the intended application, considering all object-related factors. New editions replace the information given here.